
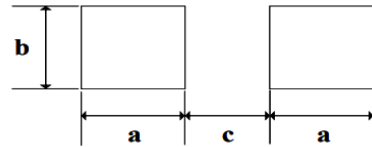


A60S series (EIA0603/1608mm)

■ Electrical Specification

Part number	A60L□□□JT200T
Capacitance	0.1 to 100pF
Working Voltage (WVDC)	250V
Quality Factor (Q)	2000 min. @ 1MHz
Temperature Range	-55 °C to + 125 °C (no derating of working voltage)
Temperature coefficient of Capacitances (TCC)	0± 30 ppm/°C, -55°C to + 125°C
Insulation Resistance	10 ⁵ MΩ min. at + 25°C at rated WVDC 10 ⁴ MΩ min. at + 125°C at rated WVDC
Dielectric Withstanding Voltage (DWV)	2.5 x WVDC for 5 seconds
Aging	None
Piezo Effects	None



■ Mechanical dimension & solder pad

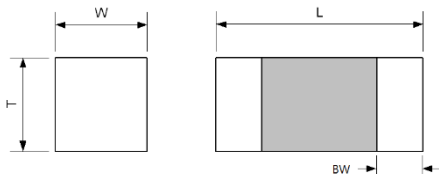

Size	L	W	T	BW
mm	1.6 ±0.15	0.8 ±0.15	0.89 Max	0.36 ±0.15
inch	.063 ±.006	.032 ±.006	.035 Max	.014 ±.006

Size	a	b	c
mm	0.75 ±0.05	0.9 ±0.10	0.8 ±0.10
inch	.03 ±.002	.035 ±.004	.03 ±.004

■ Electrical characteristics

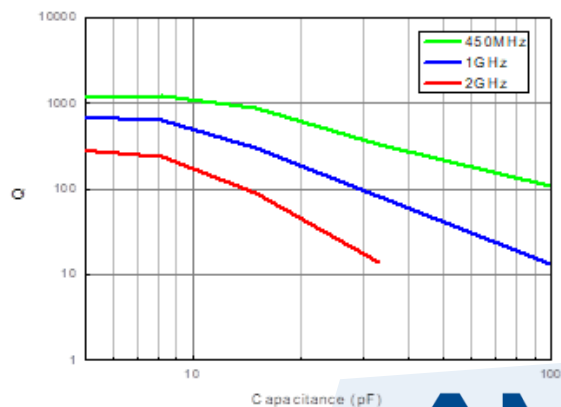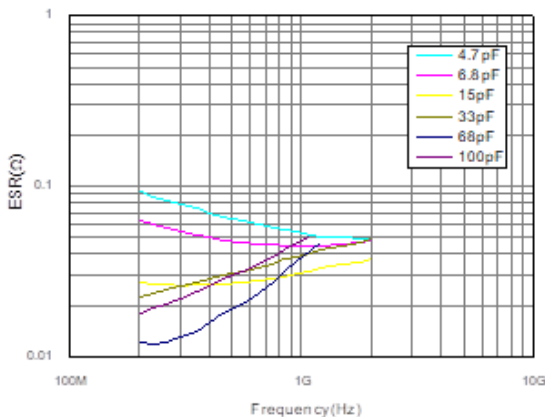

AMO
A M O T E C H