


A60L series (EIA0402/1005mm)

Electrical Specification

Part number	A60L□□□JT200T
Capacitance	0.1 to 27pF
Working Voltage (WVDC)	200V
Quality Factor (Q)	2000 min. @ 1MHz
Temperature Range	-55 °C to + 125 °C (no derating of working voltage)
Temperature coefficient of Capacitances (TCC)	0± 30 ppm/°C, -55°C to + 125°C
Insulation Resistance	10 ⁵ MΩ min. at + 25°C at rated WVDC 10 ⁴ MΩ min. at + 125°C at rated WVDC
Dielectric Withstanding Voltage (DWV)	2.5 x WVDC for 5 seconds
Aging	None
Piezo Effects	None

Mechanical dimension & solder pad

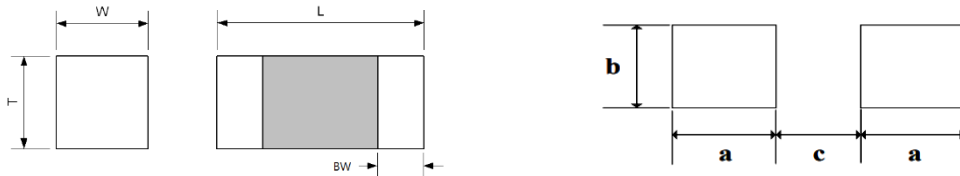

Size	L	W	T	BW
mm	1.0 ± 0.10	0.5 ± 0.10	0.6 max.	0.25 ± 0.15
inch	.040 ± .004	.020 ± .004	.024 max.	.010 ± .004

Size	a	b	c
mm	0.61	0.51	0.51
inch	0.024	0.020	0.020

Electrical characteristics

